

Soft starter, Altivar Soft Starter ATS430, 32A, 208 to 600V AC, control supply 110 to 230V AC

ATS430D32S6

EAN Code: 3606486948613

Main

Range of product	Altivar Soft Starter ATS430	
Product or component type	Soft starter	
Product destination	Asynchronous motors	
Product specific application	Standard industrial machines	
Device short name	ATS430	
Network number of phases	3 phases	
Utilisation category	AC-3A AC-53A	
Ue power supply voltage	208600 V AC (- 1510 %)	
power supply frequency	5060 Hz - 2020 %	
[le] rated operational current	Normal duty: 32 A in line (at <40 °C)	
Service factor at le	100	
IP degree of protection	IP20	
Motor power kW	7.5 kW at 230 V in line normal duty 15 kW at 400 V in line normal duty 15 kW at 440 V in line normal duty 18.5 kW at 500 V in line normal duty 18.5 kW at 525 V in line normal duty	
Motor power hp	7.5 hp at 208 V normal duty 10 hp at 230 V normal duty 20 hp at 460 V normal duty 25 hp at 575 V normal duty	
Communication port protocol	Modbus serial	

Complementary

Device connection	In line	
Overload current	400 % le for 13 s	
On-load factor	50 %	
Operating cycles/hour	10 cyc/h	
[Us] control circuit voltage	110230 V AC 5060 Hz - 1510 %	
Apparent power	70 VA	
Integrated motor overload protection	True	
motor thermal protection class	Class 10E	

Rates duty January 2016

Protection type	Phase failure: mains Thermal protection: mains Thermal protection: starter	
	Current overload: motor	
	Motor underload: motor	
	Excessive acceleration time: motor	
	Motor phase loss detection: motor	
	Protection against line phase inversion: mains External thermal protection: motor	
	Short-circuit between motor phase and earth: motor	
current limiting %In (5 x le	150700 %	
maximum) Rated current pwr loss	32 A	
specification Power loss static current	19 W	
independent Power loss per device current	6 W	
dependent		
Power loss during starting	281 W during starting at 40 °C at 400% In	
Standards	EN/IEC 60947-4-2	
	UL 60947-4-2 IEC 60664-1	
Product certifications	cULus	
	CE	
	UKCA CCC	
	RCM	
	EAC	
	KC	
Marking	CULus	
	CE UKCA	
	CCC	
	RCM	
	EAC	
Management of the second secon	KC	
[Uc] control circuit voltage	24 V DC	
Discrete input number	4	
Discrete input type	(STOP) digital input, 4.4 kOhm	
	(RUN) digital input, 4.4 kOhm (DI3) digital input, 4.4 kOhm	
	(DI4) digital input, 4.4 kOhm	
Input compatibility	STOP: digital input level 1 PLC conforming to EN/IEC 61131-2	
pat sopatizsy	RUN: digital input level 1 PLC conforming to EN/IEC 61131-2	
	DI3: digital input level 1 PLC conforming to EN/IEC 61131-2	
	DI4: digital input level 1 PLC conforming to EN/IEC 61131-2	
Discrete input logic	Digital input STOP at State 0: 0< 5 V and <= 2 mA at State 1: > 11 V, >= 5 mA	
	Digital input RUN at State 0: 0< 5 V and <= 2 mA at State 1: > 11 V, >= 5 mA	
	Digital input DI3 at State 0: 0< 5 V and <= 2 mA at State 1: > 11 V, >= 5 mA	
	Digital input DI4 at State 0: 0< 5 V and <= 2 mA at State 1: > 11 V, >= 5 mA	
Relay output number	2	
Relay output type	Relay outputs R1A, R1C NO	
	Relay outputs R1B, R1C NC Relay outputs R2A, R2C NO	
Minimum switching current	100 mA at 12 V DC for relay outputs	
Maximum switching current	Relay outputs 2 A / 250 V AC for AC-15 100000 cycles following IEC 60947-5-1	
	Relay outputs 2 A / 30 V DC for DC-13 150000 cycles following IEC 60947-5-1	
Analogue input number	1	
Analogue input type	PTC1 : PTC temperature probe	
O	PTC2 : PTC temperature probe	
Analogue output number	1	

Analogue output type	Current output AQ1 : 020 mA/420 mA , impedance< 500 Ohm Voltage output AQ1 : 010 V , impedance> 470 Ohm	
Communication port protocol	Modbus serial RJ45 Modbus serial open style (DO, D1, PE, COM)	
Connector type	1 RJ45 Open style	
Physical interface	2-wire RS 485 - connector(s): RJ45 2-wire RS 485 - connector(s): open style (DO, D1, PE, COM)	
Transmission frame	RTU : 1 RJ45 RTU : open style (DO, D1, PE, COM)	
Transmission rate	4.838.4 kbps for Modbus serial RJ45 0.3115.2 kbps for Modbus serial open style (DO, D1, PE, COM)	
Data format	8 bits, odd, even or no parity, 1 or 2 bits to stop for Modbus serial RJ45 8 bits, configurable odd, even or no parity for Modbus serial open style (DO, D1, PE, COM)	
Number of addresses	0247 for Modbus serial	
Method of access	Slave Modbus serial	
Type of polarization	No impedance for Modbus serial	
Display screen available	True	
Operating position	Vertical +/- 10 degree	
Height	273 mm	
Width	130 mm	
Depth	169 mm	
Net weight	2.90 kg	
internal bypass	True	
Function available	Single direction Pre-heating Power monitoring Condition monitoring User management Ports and services hardening Security event logging Cybersecure firmware update Small motor test	
material declaration	True	

Environment

Electromagnetic compatibility	Conducted and radiated emissions level A conforming to IEC 60947-4-2 Electrostatic discharge level 3 conforming to IEC 61000-4-2 Immunity to radiated radio-electrical interference level 3 conforming to IEC 61000-4-3 Immunity to electrical transients level 4 conforming to IEC 61000-4-4 Voltage/current impulse level 3 conforming to IEC 61000-4-5 Damped oscillating waves level 3 conforming to IEC 61000-4-18 Immunity to conducted disturbances radio-frequency level 3 conforming to IEC 61000-4-6	
Pollution degree	Level 3	
[Uimp] rated impulse withstand voltage	6 kV	
[Ui] rated insulation voltage	600 V	
Environmental class (during operation)	ng Class 3C3 according to IEC 60721-3-3 Class 3S3 according to IEC 60721-3-3	
Ambient air temperature for operation	-2540 °C (without derating) 4060 °C (with current derating of 1 % per °C above 40 °C)	
Ambient air temperature for storage	-4070 °C	

Ambient air transport temperature	-4070 °C	
Operating altitude	<= 2000 m without derating > 20004800 m with current derating 1 % per 100 m above 2000 m	
Relative humidity	595 % without condensation or dripping water conforming to EN/IEC 60068-2-3	
Maximum deflection under vibratory load (during operation)	1.5 mm at 213 Hz	
Maximum deflection under vibratory load (during storage)	1.75 mm at 29 Hz	
Maximum deflection under vibratory load (during transport)	1.75 mm at 29 Hz	
Maximum acceleration under vibrational stress (during operation)	1 gn at 13200 Hz	
Maximum acceleration under vibratory load (during storage)	1 gn at 9200 Hz 1.5 gn at 200500 Hz	
Maximum acceleration under vibratory load (during transport)	1 gn at 9200 Hz 1.5 gn at 200500 Hz	
Maximum acceleration under shock impact (during operation)	15 gn at 11 ms	
Maximum acceleration under shock load (during storage)	10 gn at 11 ms	
Maximum acceleration under shock load (during transport)	10 gn at 11 ms	
Packing Units		
Unit Type of Package 1	PCE	
Number of Units in Package 1	1	
Package 1 Height	34.5 cm	
Package 1 Width	24 cm	
Package 1 Length	22 cm	
Package 1 Weight	3.12 kg	
Unit Type of Package 2	S06	
Number of Units in Package 2	10	
Package 2 Height	73 cm	

Package 2 Width

Package 2 Length

Package 2 Weight

60 cm

80 cm

44.2 kg



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

⊘ Environmental footprint	
Total lifecycle Carbon footprint	2246
Environmental Disclosure	Product Environmental Profile

Use Better


Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Compliant with Exemptions
SCIP Number	35cb7027-fb3d-4f72-a9b1-0ae265a3258f

Use Again

○ Repack and remanufacture	
End of life manual availability	End of Life Information
Take-back	Yes
WEEE Label	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Dimensions

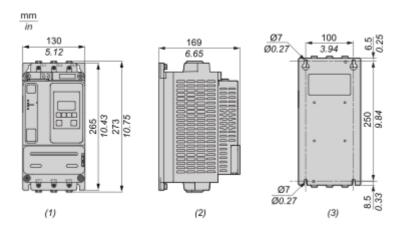

- (1) : Front (2) : Side (3) : Rear


ATS430D32S6


Mounting and Clearance


Mounting Position

The soft starter is designed to be mounted inside cabinets vertically at \pm 10° for cooling purposes.Respect the minimum clearances so that the cooling air can circulate from the bottom to the top of the soft starter. The minimum clearances apply to any device close to the soft starter such as circuit breakers, fuses and contactors.Do not install the soft starter above heating elements.

mm

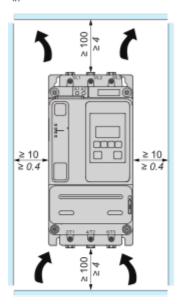

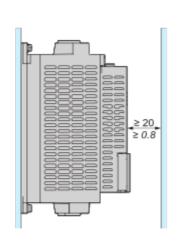







Connections and Schema

Wiring

Wiring the Power Part

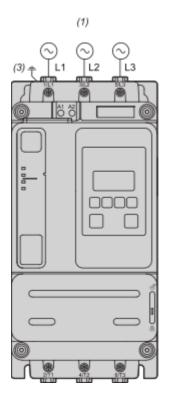

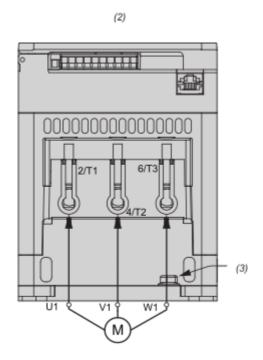

Use class C cables for the power connections.

1/L1, 3/L2, 5/L3 : Mains supply inputs 2/T1, 4/T2, 6/T3 : Outputs to motor

(1): Mains side

(2) : Motor side (bottom)


(3): Ground connection

Connection In Line, With Line Contactor, Type 1 or 2 Coordination, 2-wire control or 3-wire control

Line contactor controlled based on RUN & STOP or on detected error.

Use relay output R1 set to [Mains Contactor]

ATS430D32S6

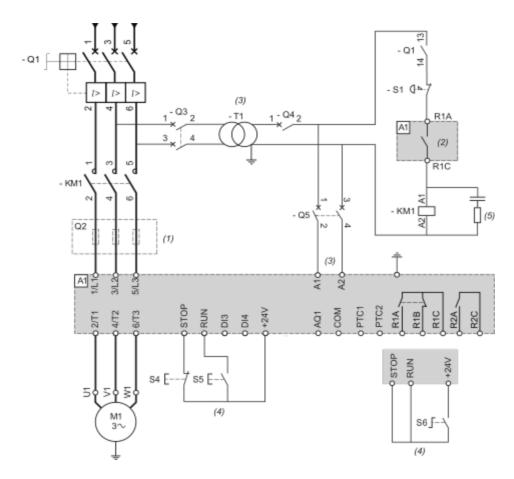

- (1): Installation of additional fast-acting fuses is mandatory to upgrade to type 2 coordination according to IEC 60947-
- (2): Take into account the electrical characteristics of the relays.
- (3) : The transformer must supply 110...230 Vac -15%...+10%, 50/60Hz.
- (4): 3-wire control or 2-wire control.
 (5): Select the appropriate voltage surge suppressor

Designation	Component	Description
Q1	Circuit breaker	Short circuit protection device for the motor
Q2	Circuit breaker	Short circuit protection device for the primary of the transformer
Q3	Fast acting fuses	Short circuit protection device of the soft starter to be used only when type 2 coordination according to IEC 60947-4-2 is required
Q4	Circuit breaker	Short circuit protection device for the secondary of the transformer
Q5	Circuit breaker	Short circuit protection device for the control part of the soft starter
KM1	Contactor	Line contactor
S1	Emergency Stop push-button	Emergency Stop to de-energized KM1 line contactor
S4	Normally close contact push- button	STOP command for 3-wire control


Product datasheet

ATS430D32S6

S5	Normally open contact push- button	RUN command for 3-wire control
	Selector switch, 2 positions, stay–put, normally open contact	RUN/STOP. command for 2–wire control

Connection In Line, With Line Contactor, Type 1 or 2 Coordination, 2-wire or 3-wire

Line contactor controlled by Power ON and Power OFF push-buttons or detected error. Use relay output R1 set to [Operating State Fault] (factory setting)

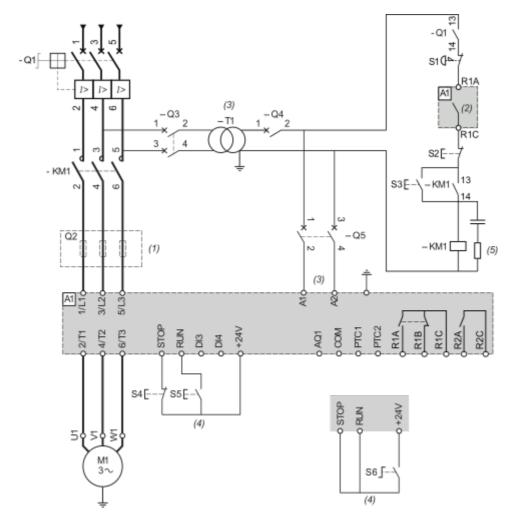

- (1): Installation of additional fast-acting fuses is mandatory to upgrade to type 2 coordination according to IEC 60947–4–2.
- (2): Take into account the electrical characteristics of the relays.
- (3): The transformer must supply 110...230 Vac –15%...+10%, 50/60Hz.
- (4): 3-wire control and 2-wire control.
- (5): Select the appropriate voltage surge suppressor.


Designation	Component	Description
Q1	Circuit breaker	Short circuit protection device for the motor
Q2	Circuit breaker	Short circuit protection device for the primary of the transformer
Q3	Fast acting fuses	Short circuit protection device of the soft starter to be used only when type 2 coordination

Product datasheet

ATS430D32S6

Q4	Circuit breaker	Short circuit protection device for the secondary of the transformer
Q5	Circuit breaker	Short circuit protection device for the control part of the soft starter
KM1	Contactor	Line contactor
S1	Emergency Stop push-button	Emergency Stop to de-energized KM1 line contactor
S2	Normally close push-button	Power OFF
S3	Normally open push-button	Power ON
S4	Normally close contact push-button	STOP command for 3-wire control
S5	Normally open contact push-button	RUN command for 3-wire control
S6	Selector switch, 2 positions, stay–put, normally open contact	RUN/STOP command for 2-wire control

Control Block Wiring Diagram

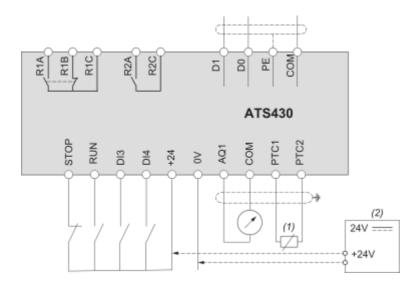

R1A, R1B, R1C : Programmable relay R1 R2A, R2C : Relay assigned to End of starting STOP, RUN, DI3, DI4 : Digital inputs

AQ1: Analogue output PTC1, PTC2: PTC connection


D0, D1 : Serial link based on 2-wire Modbus over serial line electrical interface

(1): 2 wire PTC

(2): Optional, in case of +24 External Supply usage

Technical Illustration

Dimensions

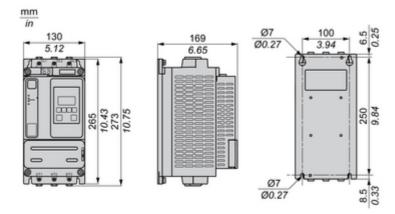

Technical Illustration

Wiring diagram


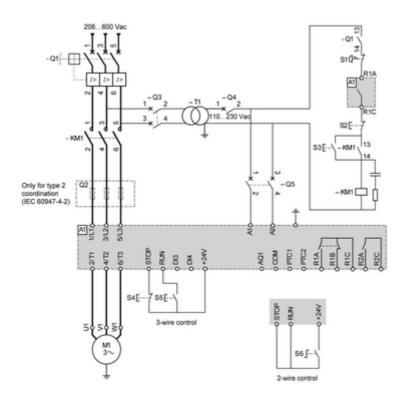


Image of product / Alternate images

Alternative





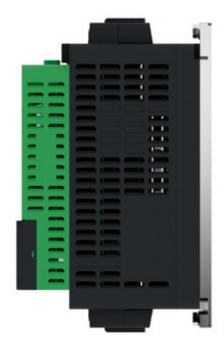



15



